


RCCN 日成NBL型金属软管防水接头 Metal Flexible Conduit Fittings



推荐

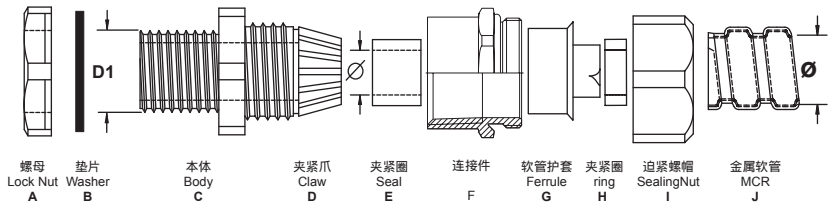

螺母 Lock Nut A 垫片 Washer B 本体 Body C 夹紧爪 Claw D 夹紧圈 Seal E 连接件 F 软管护套 Ferrule G 夹紧圈 ring H 压紧螺母 SealingNut I 金属软管 MCR J

螺纹规格:管螺纹G/PF牙,公制螺纹Metric,德制螺纹 PG
产品材质:A.C.F I部位均采用黄铜镀镍制.

B.E.H采用丁腈橡胶(NBR)制成.G为铁皮制成.

产品认证:欧洲CE,欧洲环保RoHS

颜色种类:金属色(黄)

防护等级:IP67, 如需IP68需配套日成含胶管SCM二次保护接头.

工作温度:-40°C至100°C,瞬间可耐热达120°C.

产品特性: 1.外型美观,结构紧密,强度更高.

2.软管护套设计与软管相扣接紧之设计,配合迫紧头表配备省时便利,抗拉力特强.

3.可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂.

4.除以下标准规格外,可另按需求任意变动大小及螺纹标准.

备注:成品均配带螺母A及防水垫片B,可定制特殊规格不同的螺纹和配套和管.

Thread:G,Metric, PG

Material:A.C.F.I are made from Brass metal.B.E are made of rubber (NBR).D is made of sheet iron

Certificates:CE,ROHS

Color:Argentine(yellow)

Protect:IP67,if request IP68, need to use with RCCN SCM connectors

Operate T.: -40°C to 100°C, 120°C in a short time.

Products characteristics: 1.thickness added zinc metal,good looking

2.common impregnant resistant,such as water,salty, alcohol,oil, grease and so on.

3.we can adjust the sizes according to your request.

4.special sizes can be produced

Remarks:The finished goods are including locknut and washer.



单位/Unit:mm

型号 Item No.	螺牙标准 Thread	适用电缆 Cable Range	配套日成金属软管MCR Suitable RCCN metal flexible conduit MCR			螺纹外径 Thread O.D. D1	螺纹长度 Thread Length L1	包装 Packing pcs
			对应型号 Corresponding item no	公制 Metric ø	英制 British			

公制螺牙/Metric thread NBL-M

NBL-03M	M16*1.5	4-8	MCR-03	10	1/4"	M16*1.5	8	50
NBL-04M	M16*1.5	6-10	MCR-04	13	3/8"	M16*1.5	11	50
NBL-05M	M20*1.5	8-12	MCR-05	16	1/2"	M20*1.5	14	50
NBL-06M	M25*1.5	8-12	MCR-06	20	3/4"	M25*1.5	14	50
NBL-08M	M32*1.5	15-21	MCR-08	25	1"	M32*1.5	15	50
NBL-10M	M40*1.5	18-25	MCR-10	32	1 1/4"	M40*1.5	15	25
NBL-12M	M50*1.5	26-32	MCR-12	38	1 1/2"	M50*1.5	16	25
NBL-16M	M63*1.5	37-44	MCR-16	51	2"	M63*1.5	18	10
NBL-20M	M72*2	42-52	MCR-20	64	2 1/2"	M72*2	22	10
NBL-24M	M88*2	55-62	MCR-24	80	3"	M88*2	22	5
NBL-32M	M 114*2	78-84	MCR-32	100	4"	M 114*2	24	5

德制螺牙 /Metric thread NBL-P

NBL-03P	PG9	4-8	MCR-03	10	1/4"	15.2	8	50
NBL-04P	PG 11	6-10	MCR-04	13	3/8"	18.6	9	50
NBL-05P	PG13.5	8-12	MCR-05	16	1/2"	20.4	11	50
NBL-06P	PG21	13-18	MCR-06	20	3/4"	28.3	14	50
NBL-08P	PG29	18-25	MCR-08	25	1"	37.0	15	50
NBL-10P	PG29	18-25	MCR-10	32	1 1/4"	37.0	15	25
NBL-12P	PG36	26-32	MCR-12	38	1 1/2"	47.0	16	25
NBL-16P	PG48	37-44	MCR-16	51	2"	59.3	18	10

管螺牙 /Tube thread NBL-G

NBL-03G	G3/8"	4-8	MCR-03	10	1/4"	16.66	8	50
NBL-04G	G3/8"	6-10	MCR-04	13	3/8"	16.66	8	50
NBL-05G	G1/2"	8-12	MCR-05	16	1/2"	20.95	11	50
NBL-06G	G3/4"	13-18	MCR-06	20	3/4"	26.44	14	50
NBL-08G	G1"	15-21	MCR-08	25	1"	33.25	15	50
NBL-10G	G1 1/4"	22-28	MCR-10	32	1 1/4"	41.91	15	25
NBL-12G	G1 1/2"	26-32	MCR-12	38	1 1/2"	47.8	16	25
NBL-16G	G2"	37-44	MCR-16	51	2"	59.6	18	10

